

SR 18 Covington

Milepost 7.8 to 11.38

SR 18 Covington


Length: 2.38 miles
 Median width: 40 feet
 Speed limit: 60 mph
 Barrier type: High-tension
 Year installed: 2006

SR 18 SE 312th Vicinity

Length: 0.09 miles
 Median width: 40 feet
 Speed limit: 60 mph
 Barrier type: Generic
 Year installed: 2004



Average annual daily traffic volume
 Vehicles per day by year

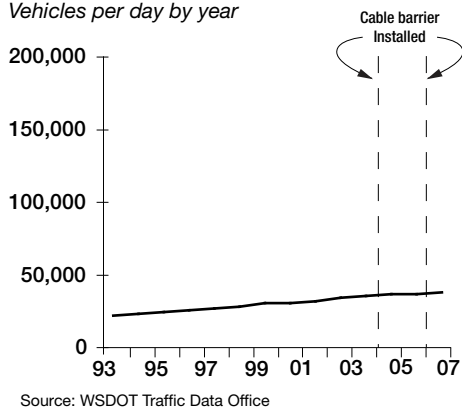

Source: WSDOT Traffic Data Office

ADT average growth rate on segment is 4 percent per year.

SR 18 Covington	No injury	Possible injury	Evident injury	Serious injury	Fatality
All median collisions before (60 months)	7	2	1	0	0
All median collisions after (19 months)	8	2	1	0	0
Cross median collisions before (60 months)	3	1	0	0	0
Cross median collisions after (19 months)	0	0	0	0	0

SR 18 SE 312th Vicinity	No injury	Possible injury	Evident injury	Serious injury	Fatality
All median collisions before (60 months)	0	0	0	0	0
All median collisions after (37 months)	6	1	0	0	0
Cross median collisions before (60 months)	0	0	0	0	0
Cross median collisions after (37 months)	1	0	0	0	0

The cable median barrier generally is located nine to 10 feet from the edge of the southbound lanes.

There has been a single cross-median incident since we installed this barrier. A westbound vehicle lost control and entered the median. It struck both cable median barrier and w-beam guard rail in the median, it continued across the eastbound lanes coming to rest off the the roadway without striking any other vehicles.

